


SPECIFICATION

FOR APPROVAL

Part number : BSMT-9032S-3027
Description : SMD Magnetic transducer
(RoHS compliance / non washable)
Country of origin : Republic of Korea
Date : 17th JUL 2018
Drawn by : Donggyu Kim

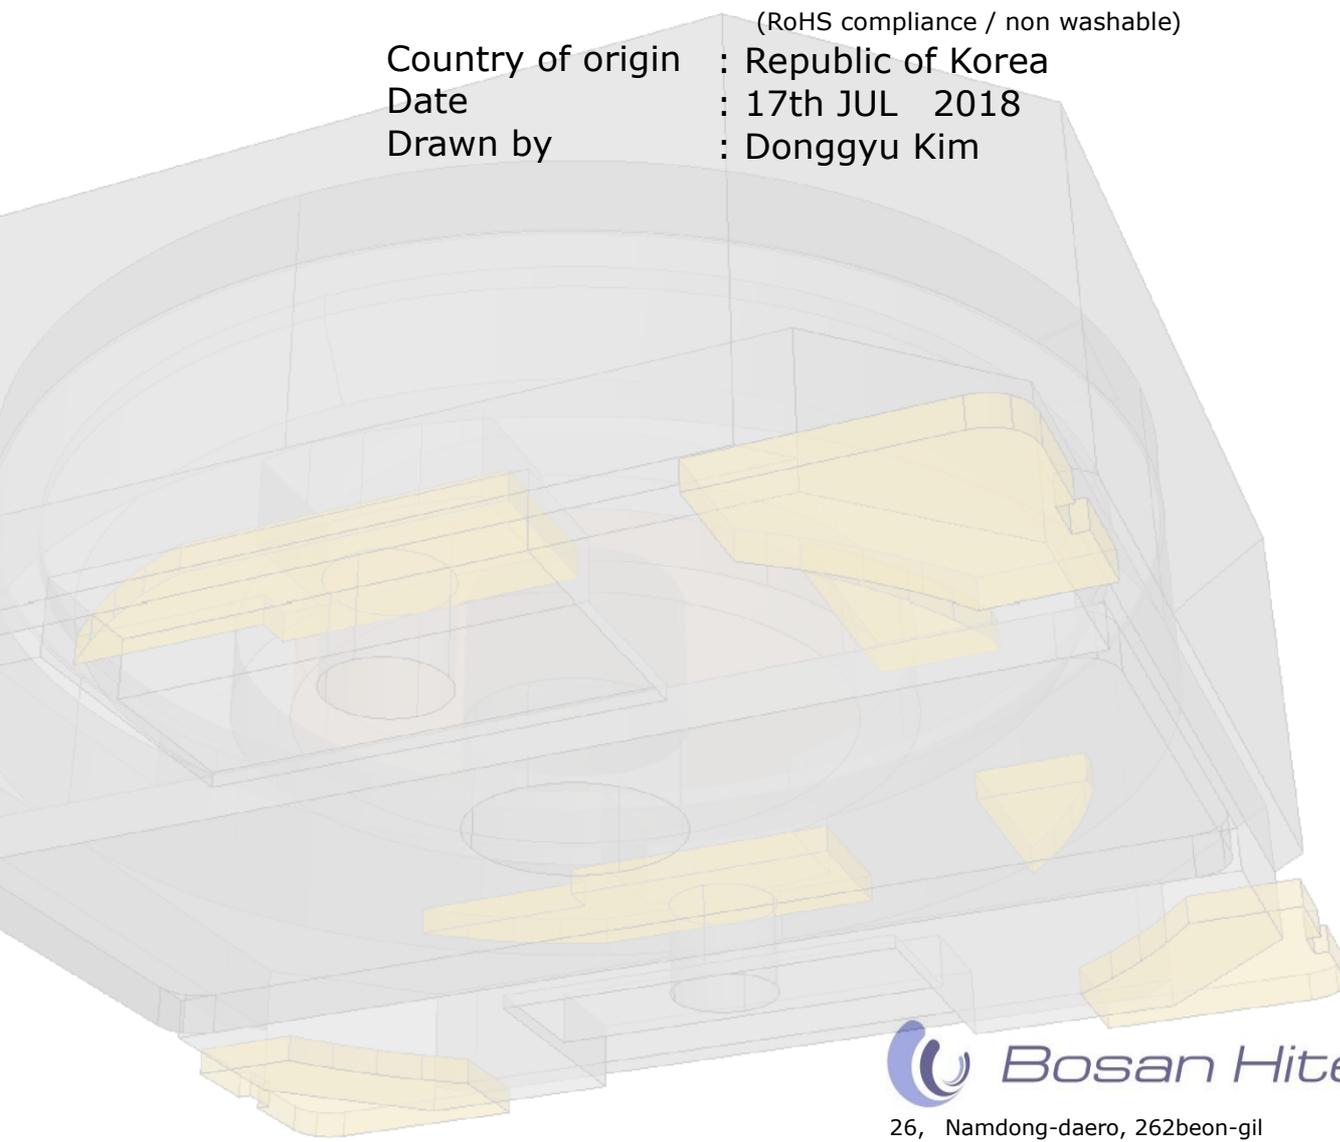

26, Namdong-daero, 262beon-gil
Namdong-gu, Incheon, 21642 Korea.
Phone : +82-32-818-2125, Fax : +82-32-818-8780
email : hong@bosanhitech.com

INDEX

| | |
|---|----|
| Revision Note | 3 |
| 1. Scope | 4 |
| 2. Product Photos | |
| 3. Electrical acoustical characteristics | |
| 4. Mechanical Characteristics | 5 |
| 1) Dimensions | |
| 2) Date code recognition method | |
| 5. Reliability test | 6 |
| 6. Warranty | |
| 7. Operating instructions | 7 |
| 1) recommended input signal | |
| 2) recommended circuit diagram | |
| 8. Soldering instructions | 8 |
| 1) recommended SMT reflow temperature profile | |
| 2) recommended PCB pattern | |
| 3) recommended iron soldering condition | 9 |
| 4) washing conditions | |
| 9. Trouble shootings | |
| 10. Sound measuring instructions | 10 |
| 1) measuring conditions | |
| 2) Frequency - Sound pressure level curve | |
| 11. Packing details | 11 |
| 1) reel and carrier | |
| 2) carton | 12 |


REVISION NOTE

| # | DATE | CONTENT | BY |
|---|-------------|-----------------|-------------|
| 1 | 17 Jul 2018 | Initial release | Donggyu Kim |

1. Scope

This document specifies a SMD magnetic transducer/buzzer, and the main application of this part is for an electronic device which requires audible feedback for human ears recognition.

2. Product Photos

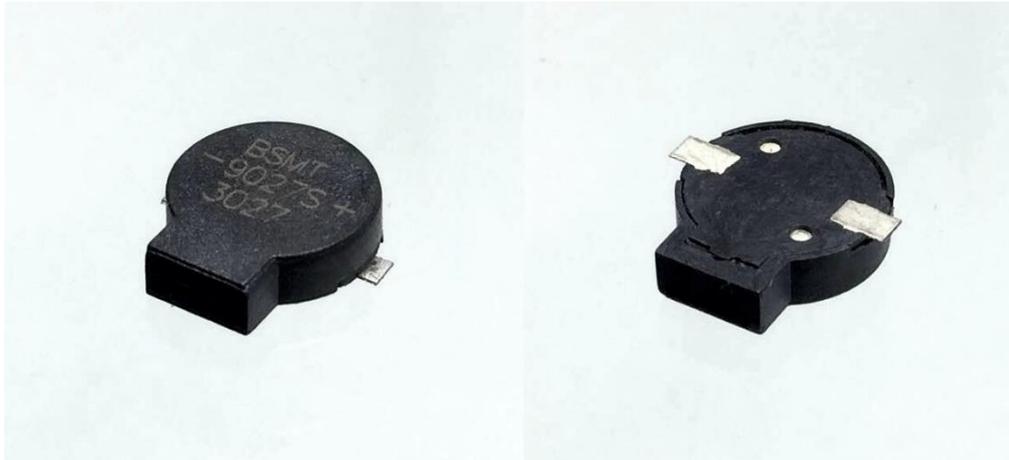

* Above photo is an advertising purpose, so its appearance/printing may be different from an actual product


3. Electrical and acoustical characteristics

| PARAMETERS | SPECIFICATIONS | UNIT |
|-------------------------|----------------|------|
| Rated voltage | 3.0 | Vo-p |
| Operating voltage | 1.5 ~ 4.5 | Vo-p |
| Current consumption | max 60 | mA |
| Coil DC resistance | 16 ± 15 % | Ω |
| Operating frequency * | 10 ~ 10,000 | Hz |
| Rated frequency | 2,700 | Hz |
| Sound pressure level ** | Min. 95 | dBA |
| Operating temperature | -40 ~ +90 | °C |
| Storage temperature | -40 ~ +90 | °C |

* This part is designed to make its max sound at 2,700 Hz and sound will decrease in other frequency range ** measured from 10 cm distance with input signal described in above table.


4. Mechanical characteristics

1) Dimensions

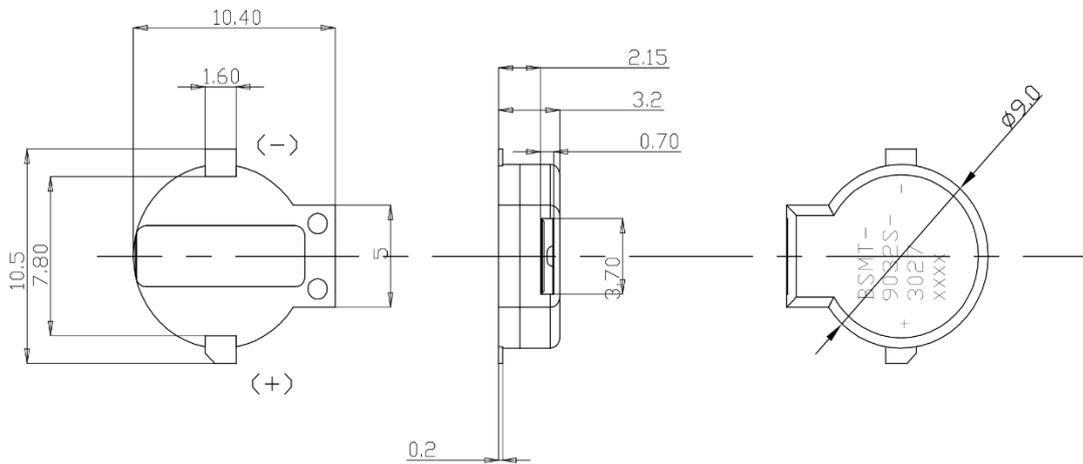

Housing Material : LCP
Lead material : Tin plated Brass
tolerance : +/- 0.2 mm

2) Date code recognition method

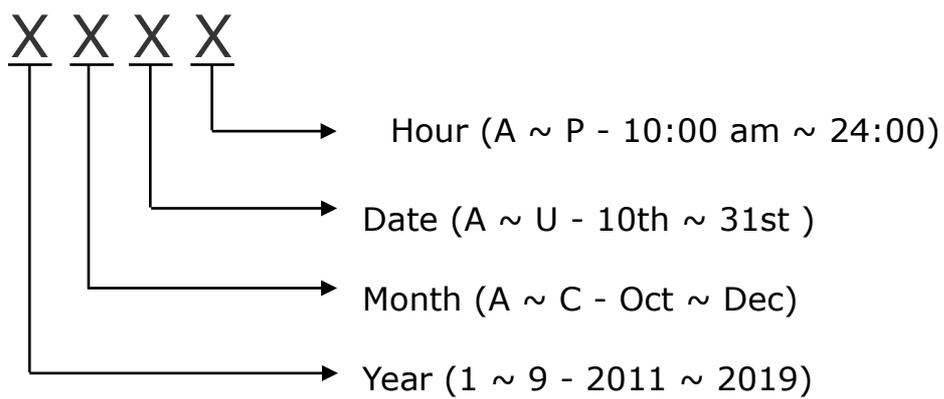

5. Reliability Test

| No. | Item | description |
|-----|--------------------------|---|
| 1 | low storage temperature | Store in -40°C for 96 hours, then expose to room temperature for 4 hours |
| 2 | high storage temperature | Store in +90°C for 96 hours, then expose to room temperature for 4 hours |
| 3 | temperature cycle | Total 50 cycles of low & high temperature. Each cycle consists of 30 mins of -40°C and 30 mins of +90°C |
| 4 | humidity resistance | Storing 72 hours at 40°C with 95% relative humidity, then expose to room temperature for 4 hours |
| 5 | random vibration | Vibrating part with 55 Hz for 10 mins and 150 Hz for 10 mins, each 20 mins for X,Y,X axis(total 60 mins). random gravity range : 0.5 ~ 10.0G, |
| 6 | drop test | Free fall onto concrete floor from 50cm height, 10 times. |
| 7 | shear test | Pulling a part mounted on PCB with strength of 1kg force for 30 seconds. |
| 8 | Operating life | Operating a part at its rated input signal for 1000 hours at room temperature |


6. Warranty

- 1) period of warranty : 6 months from ship date
- 2) Product life : 5 years from its production date under manufacturer's storage.
- 3) This part is manufactured, inspected and packed in Republic of Korea
- 4) Any failed parts worked under conditions not specified in this document are not responsible for the manufacturer.
- 5) Any parts measured by methods not specified in this document are not warranted.
- 6) Unassembled or thermally damaged parts won't be retrieved for analysis / corrective action report purpose. Customer is responsible for returning parts as original as possible for any inspection / analysis purpose.
- 7) Manufacturer's guaranteed quality breakpoint is 300 ppm after SMT. Customers who are experiencing failure rate that is higher than 300 ppm can ask manufacturer for refund or free replacement.
- 8) This component complies below environmental regulations

Directive 2002/95 /EC - Restriction of Hazardous Substances Directive
EC No 1907/2006 - Regulation on SVHC candidate lists under REACH regulation
Halogen free under IPC regulation

7. Operating instructions


1) recommended input signal

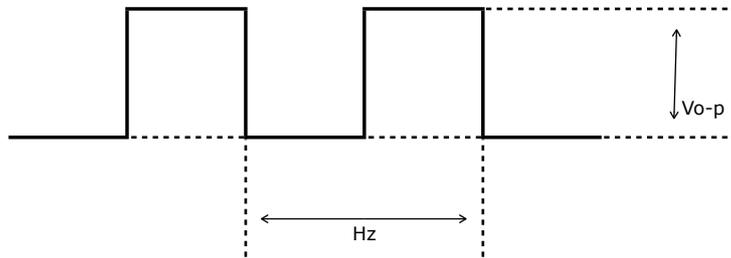

This product is designed to make its max sound when AC input signal shown in above figure with its rated voltage and frequency flows.

PWM is the most frequently used input signal source in general. Sine wave can also be used as an input signal.

2) recommended circuit diagram

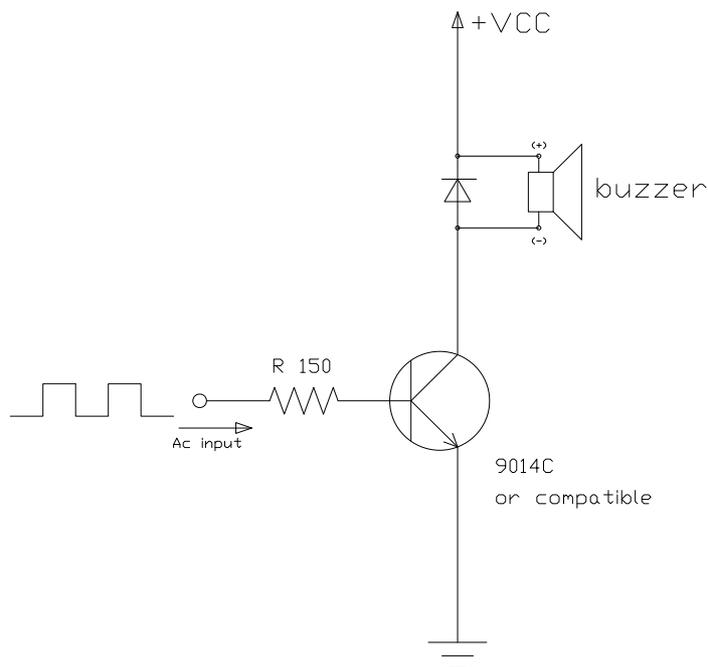


To minimize current consumption, please consider adjust its duty ratio from 50:50 to 10:90(high : low) then the consumption will decrease by about 30~40%.

Basic program source which demonstrates melody and click sound is available in C or hex format. Please [contact us](#) for technical support.

Reversed polarity will result in low sound.


8. Soldering instructions

1) Recommended SMT reflow temperature profile

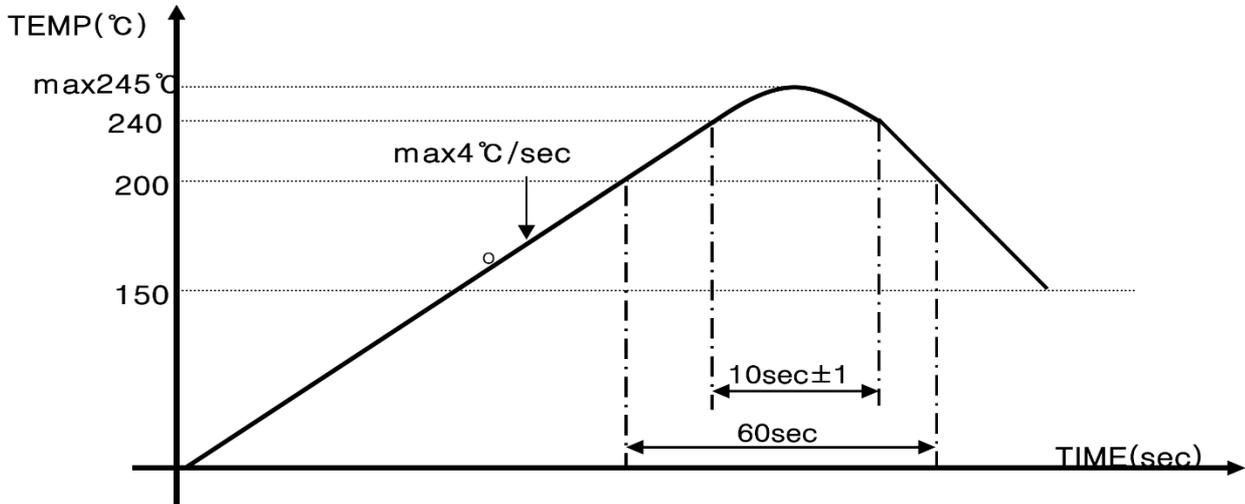

This part is able to withstand above temperature condition by 2 passes

2) Recommended PCB pattern

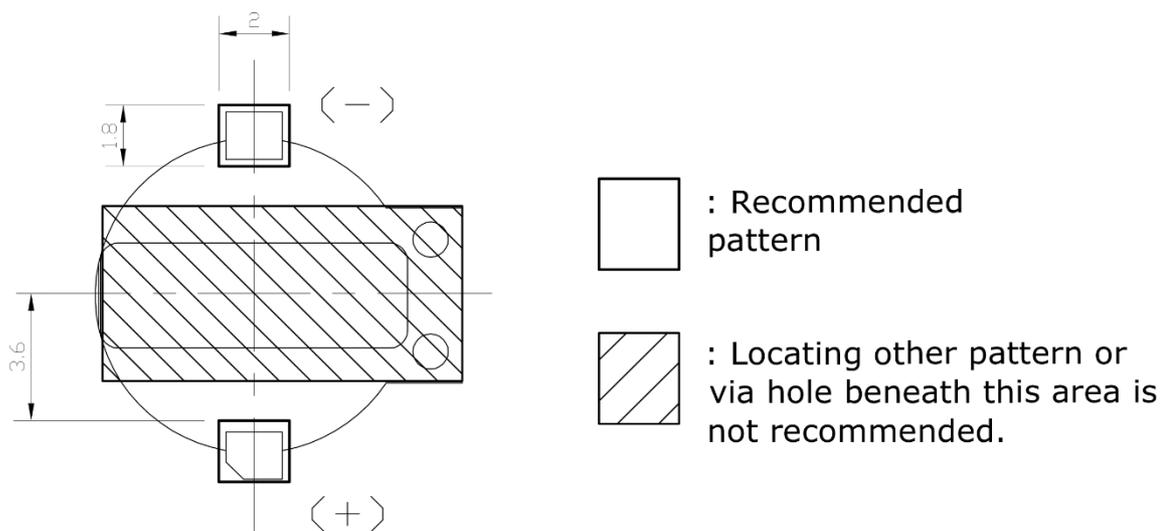

3) Recommended iron soldering condition

This part is designed for SMT soldering only. Working with manual iron is not recommended except sample test or rework.

In case of iron soldering, the iron tip temperature should be lower than 240 degree celsius and soldering time should be shorter than 15 seconds.

4) Washing conditions


This part is not washable type. So soaking into solvent or water will result in decrease of sound level.

9. Trouble shootings

| description | Possible reason | Possible solution |
|-----------------|-------------------------|---|
| No sound | Input signal is DC | Please use square / sinusoidal AC signal. |
| | Wrong pin connection | Please see page 5 and check the pin connections |
| Low sound level | Polarity reverse | Change input signal polarity |
| | Solvent penetrated | Washing should be minimized. |
| | Internal coil melt down | Please use an iron tip with temperature lower than 265 °C or check the input voltage |
| | Demagnetized | This product has permanent magnet inside. In case of contact with strong magnet force it will be de-magnetized and this possibly will decrease sound level. |
| Noisy sound | Voltage is too high | Powerful current will make this part's diaphragm vibrates stronger than its designed allowance |
| | Frequency is low | If signal's frequency is at the part's resonant frequency, it will result in noisy sound. Please raise frequency by about 50 Hz. |


10. Sound measuring instructions

1) Measuring conditions

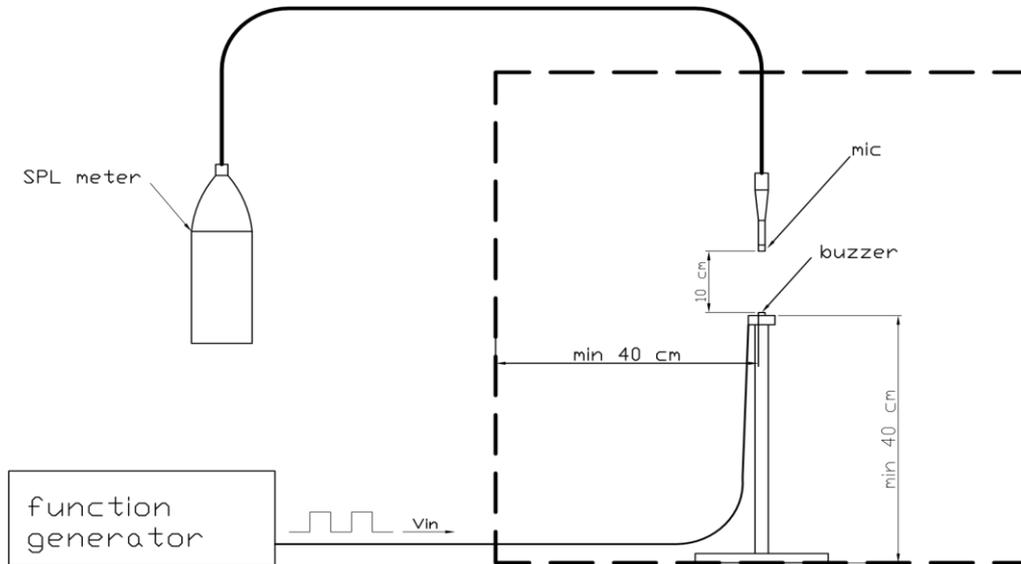

* Sound hole direction should be toward mic.

2) Frequency - Sound pressure level(SPL) curve

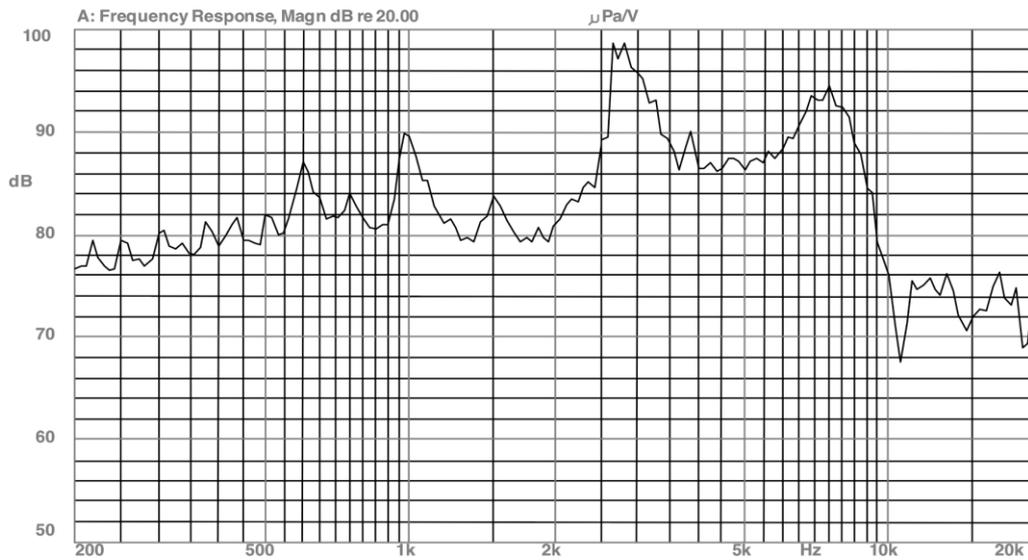


Mode: SSR



11. Packing details


1) Reel and Carrier

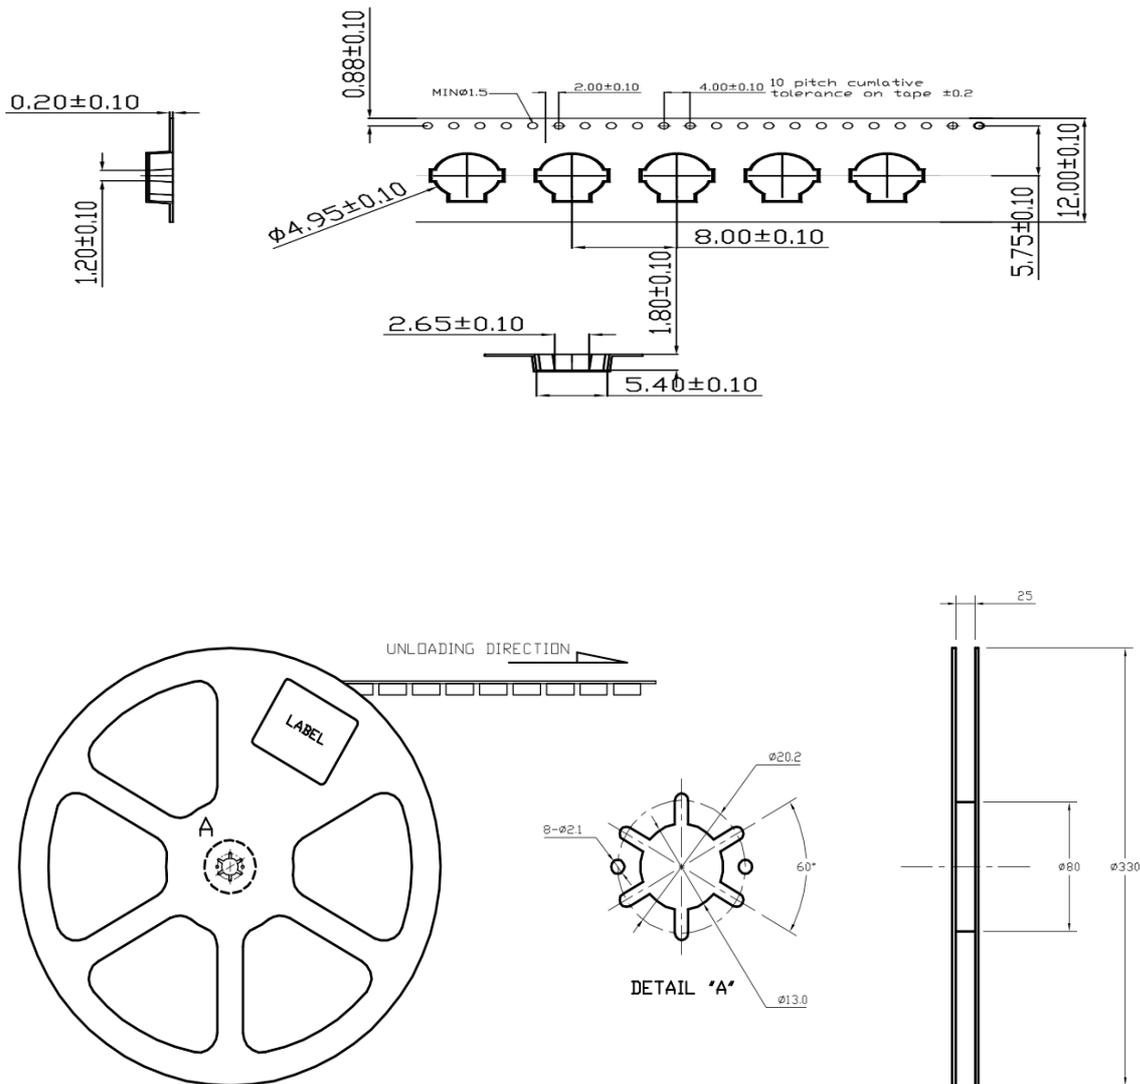

<< Remarks >>

- . Unit : mm
- . General corner unless specified : R 0.25 mm
- . General tolerance : 0.1 mm
- . Reel and carrier specification refers to JIS C 0806
- . Quantity per a reel is 1,000 EA
- . 50 pockets at both end are empty for leader purpose.

2) Carton

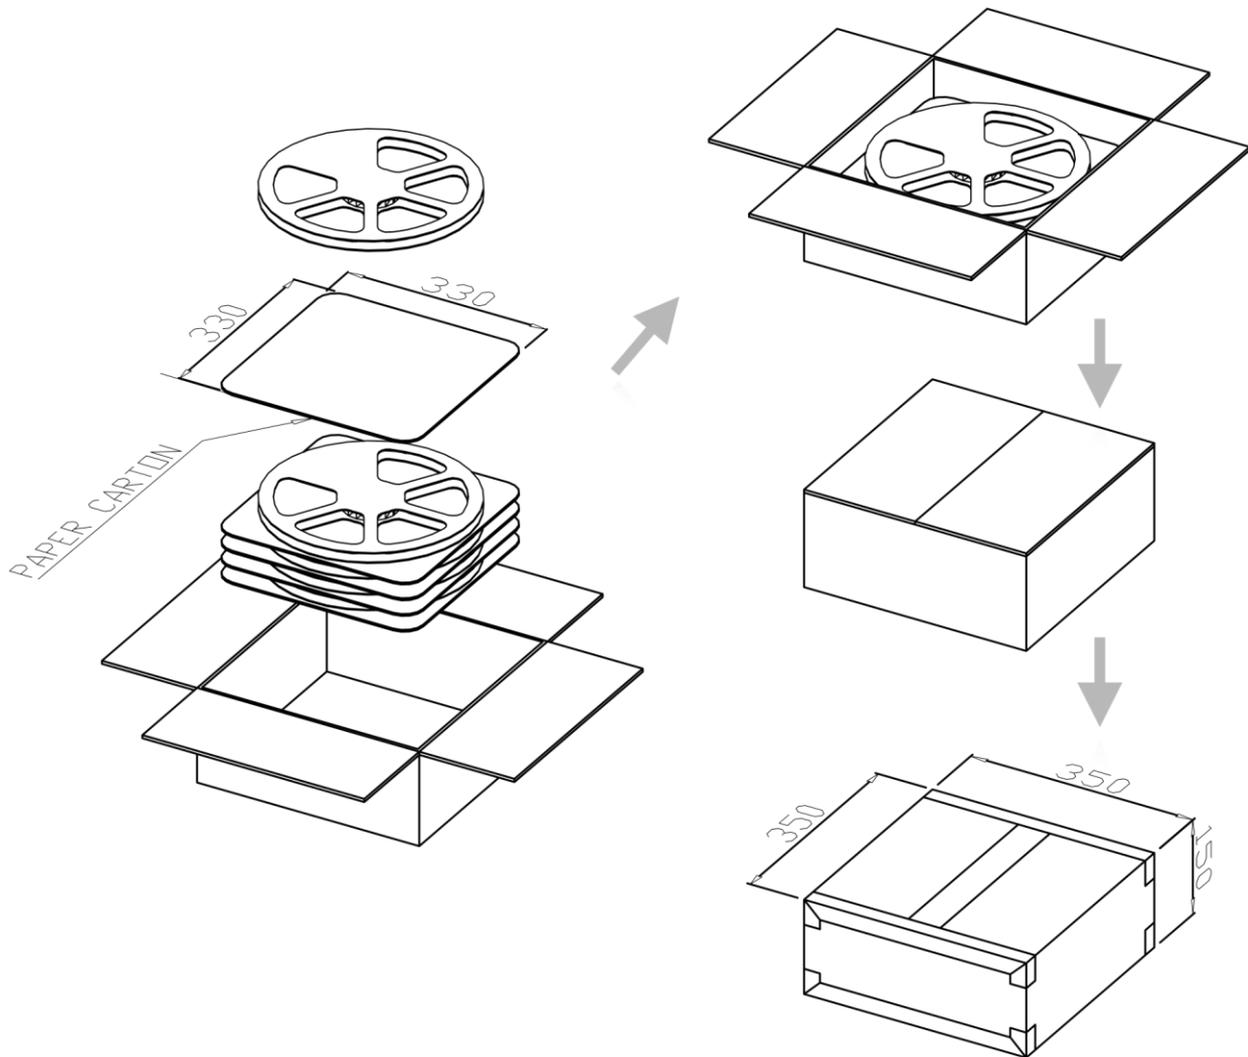

<<Remarks>>

- . Unit : mm
- . Reels per a carton : 5 EA
- . Net weight of one carton : 4.7 kg
- . Gross weight of one carton : 5.5 kg
- . Water resistant packaging for vessel shipment is available.
- . Labels will be attached onto each reels and cartons.
- . Shipment with smaller quantity than 5,000 EA can be different from given details.